


HYPERBELL


JAYFLEX

[PATENT-PENDING]


BAR AND KETTLEBELL SETUP




1. Twist collar off clamp.

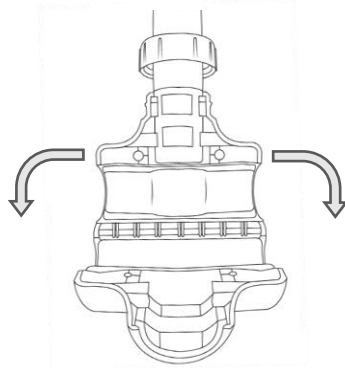

2. Open clamp.

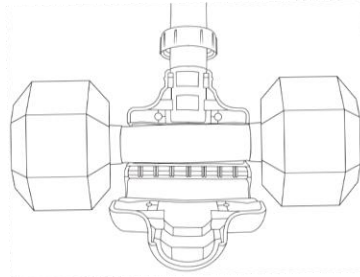

3. Insert dumbbell, close clamp.

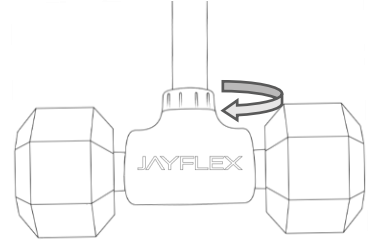


4. Twist collar to lock clamp.


ROTATE KETTLEBELL HANDLE



1. Remove collar, open clamp.

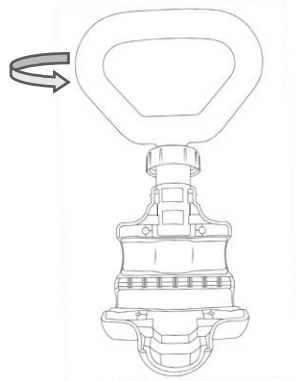

2. Lift handle out, rotate handle 90°, place back in clamp.

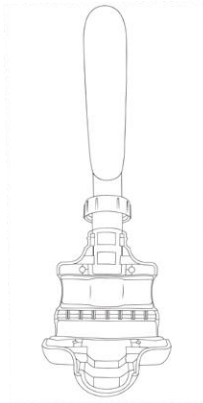


3. Close clamp, twist collar on.


DUMBBELL REQUIREMENTS

HYPERBELL works with almost all regular and adjustable dumbbells. From rubber hex dumbbells to Bowflex SelectTech, and everything in between, the foam inside the clamp is designed to adapt and cushion for the perfect fit. However, there are some limitations (see diagram to the right). HYPERBELL does not work for PowerBlock dumbbells.

Weight Limit: HYPERBELL Bar can hold a total of 200 lbs (100 lb dumbbell on each side). HYPERBELL Kettlebell can hold up to 100 lbs.

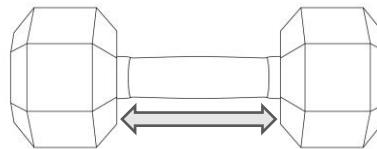

Handle length must be at least 4.5 inches.

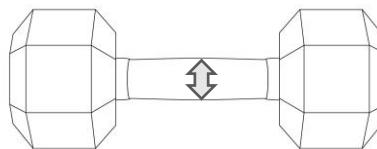

Handle diameter must be 1.5 inches or less.

Warnings: Each HYPERBELL clamp has a 100 lb weight limit. This means the bar can hold up to 200 lbs and the kettlebell 100 lbs. Do not exceed weight limit. | Always confirm that the collar is locked and the clamps are secure. | HYPERBELL is not intended to be used as a sledgehammer. | Use HYPERBELL at your own risk. | Jayflex is not responsible for any damage or injury that may occur. | Consult a physician before beginning any exercise program. Properly rehydrate and stretch before physical activity. If you experience any feeling of dizziness while exercising, please stop immediately.